
Silgan White Cap 500-1



I am pleased with the overall service and care for the client. When I call Silgan, someone almost always picks up right away. If I leave a voice message, I get a response the same day.

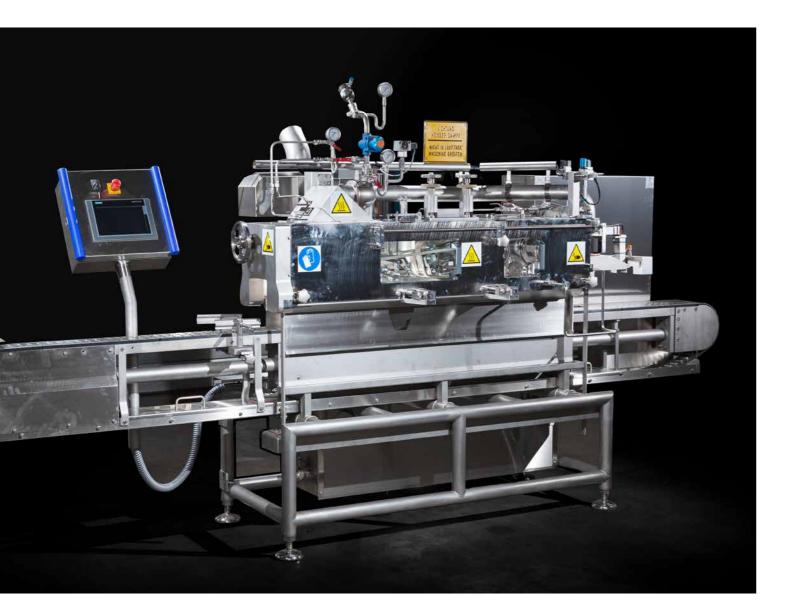

Electrical requirements 400 V 50/60 Hz

5.5 kW **Steam requirements** 5 – 8 bar 30 – 90 kg/h

Steam supply line connection

R 3/4" Exhaust pipe Ø 150 mm minimum

Preferably soft water R 1/4"

0.25 m³/h


Max. line speed 500 per min. for Twist-Off®

and for PT

Closure types Suitable for all Twist-Off® & PT closure types with 27 – 100 mm Min. 30 mm Max. 300 mm

-> Min. 40 mm Max. 160 mm



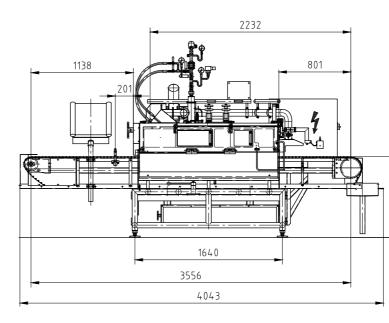

Features:

- Less maintenance and lower noise levels due to new cam belt drive for sealing and side belts
- Split lower cap track for easier set-up and adjustment to different closure diameters
- Separate lateral drag arm for optimised capping rate
- Sliding doors for easier access
- Electronic adjustment to different jar heights
- Frequency converter for speed control
- Available in right- or left-handed configuration

