


# Silgan White Cap Magnet Elevator MF

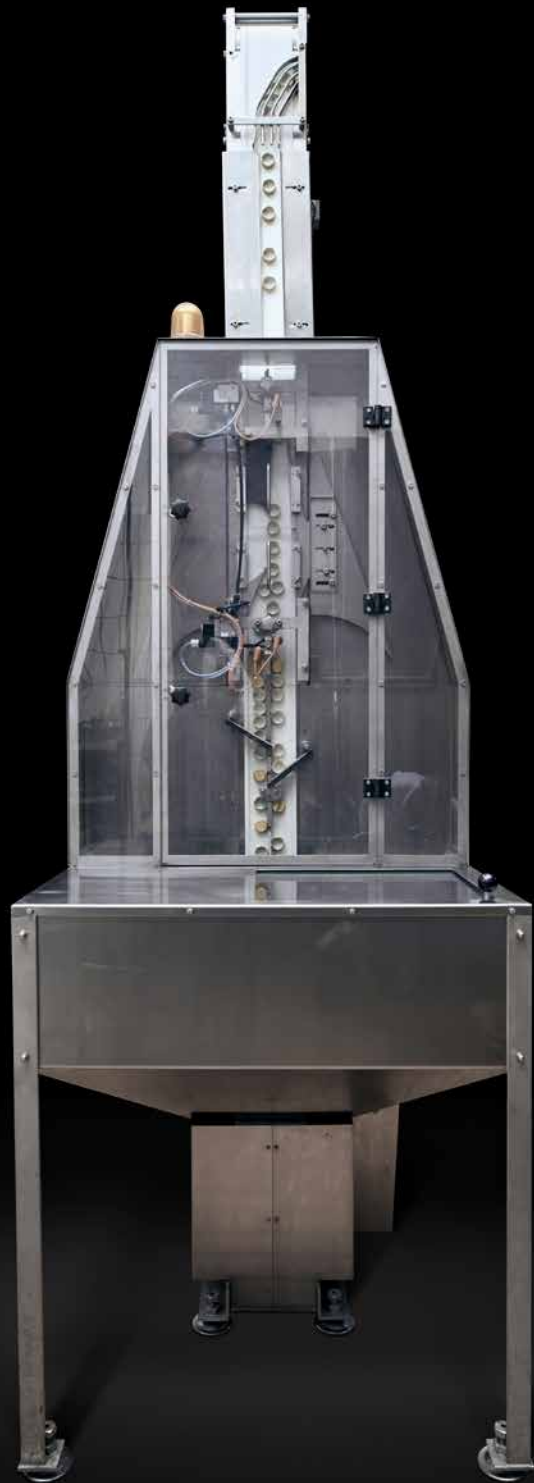

## Container content for cap

### Ø (mm) / Container type

	A	I	II
38	7.750	9.000	30.000
53	4.250	7.000	25.000
66	2.750	5.000	18.000
82	1.650	3.000	10.000

### III

38	44.000
53	35.000
66	24.000
82	14.000


## Electrical requirements

400 – 460 V  
50 / 60 Hz  
1.0 kW

## Compressed air

6 bar min.

The Silgan White Cap Magnet Elevator MF is ideal for line speeds of up to 800 caps per minute. The fundamental concept of the standard elevator serves as the basis for this new magnet elevator, type MF.

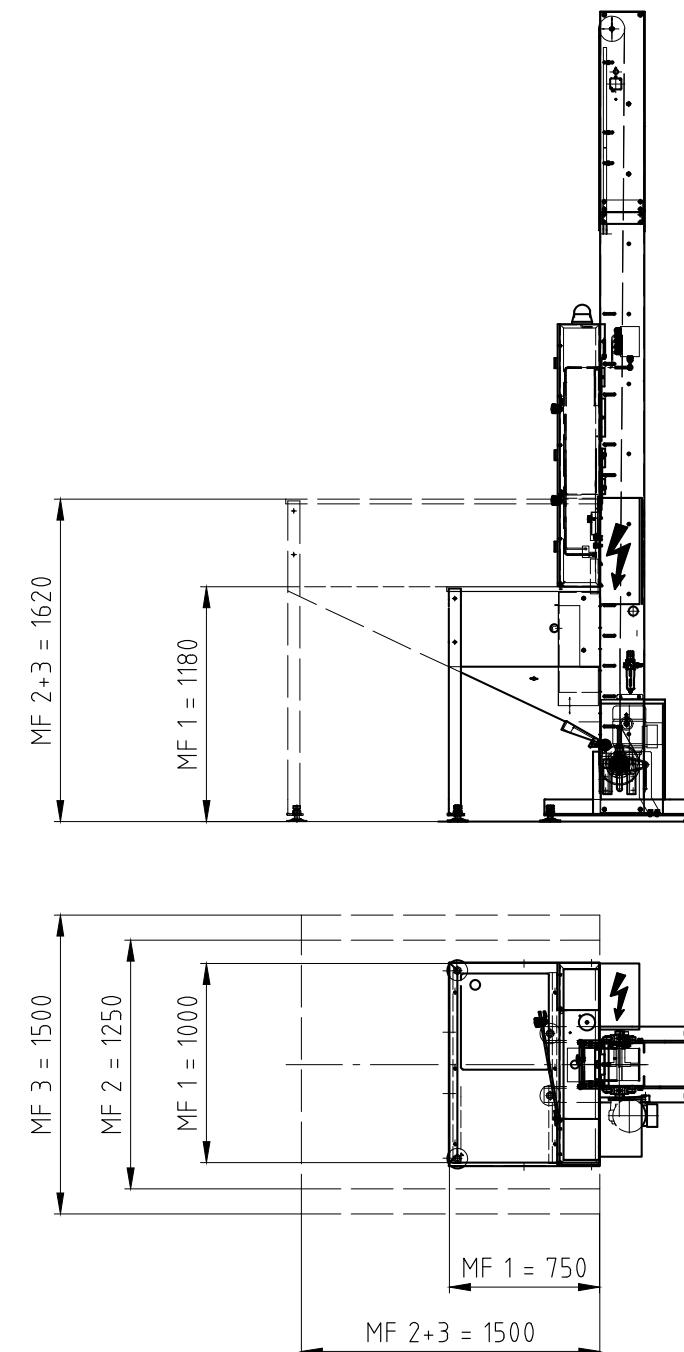

## Features:

- Physical separation of feeds from the product area
- Available as 2-row type „MF-D“: line speed increased to > 1000 caps per minute for cap diameters of 27 to 53 mm
- Drive with flange motor at the base of the elevator
- Frequency control for line speed adjustment
- Reduced noise levels
- Simple change-over to other cap types

